


## LUPEROX<sup>®</sup> F40P-SP2

40% Powder on calcium carbonate

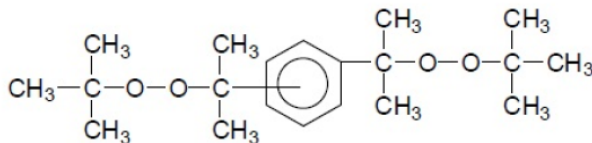

**Chemical name:** 1,3,4-bis(tert-butylperoxyisopropyl)benzene

**CAS Number:** 25155-25-3

**Molecular Weight (g/mol):** 338.5

**EINECS:** 246-678-3

### STANDARD SALES SPECIFICATIONS

Characteristics	Value
Appearance	Powder
Active oxygen	3.59 – 3.97 %

### APPLICATIONS

Luperox<sup>®</sup> F40P-SP2 E is bifunctional peroxide formulation used for the crosslinking of natural and synthetic rubbers. It is used in many applications such as building profiles, automotive rubber parts, wire and cable, technical rubber parts.

### SAFETY AND HAZARD CLASSIFICATION

Please consult the Safety Data Sheet before using the product.

### STORAGE AND HANDLING

Please consult the Safety Data Sheet or the brochure « Safe handling of Organic Peroxides ».

Storage temperature: < 30°C

Shelf-life: 12 months from reception date.

# LUPEROX<sup>®</sup> F40P-SP2

## PACKAGING AND TRANSPORT

In a 20 kg carton box.

**Arkema Inc. (USA)**  
900 First Avenue  
King of Prussia, PA 19406 - USA  
T +1 610 205 7000

**Arkema Investment Co. Ltd (China)**  
6/F Block 1, Life Hub@Daning  
1868 Gonghexin Road,  
200072 Shanghai - China  
T +86 21 6147 6888

**Headquarters: Arkema France**  
51, Esplanade du Général de Gaulle  
92800 Puteaux - France  
T +33 (0)1 49 00 80 80  
[www.luperox.arkema.com](http://www.luperox.arkema.com)

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof. Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

[www.arkema.com](http://www.arkema.com)

**ARKEMA**

**harwick.com**

**Marketed By Harwick Standard Distribution Corporation**

**(330) 798-9300**