


## DI-CUP<sup>®</sup> 40C

Di-Cup<sup>®</sup>40C is a 40% dicumyl peroxide on precipitated calcium carbonate

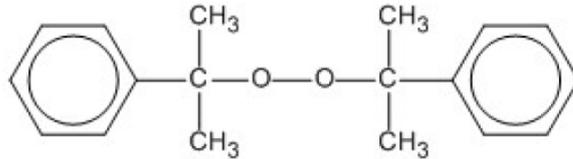

**Chemical name:** Dicumyl peroxide

**CAS Number:** 80-43-3

**Molecular Weight (g/mol):** 271

### STANDARD SALES SPECIFICATIONS

Characteristics	Value
Appearance	Powder
Peroxide content	39.5 - 41.5%

### TYPICAL PROPERTIES

Property	Value
Self Accelerated Decomposition Temperature (SADT)	196°F (91°C)
Melting point	38°C (100°F)

### APPLICATIONS

Di-Cup<sup>®</sup> 40C is frequently used as a high temperature crosslinking agent for curing rubber and elastomers. Compounds containing Di-Cup<sup>®</sup> 40C are most often processed at temperatures of 300°F to 425°F.

# DI-CUP<sup>®</sup> 40C

## HALF-LIFE TEMPERATURE

The half-life time of a peroxide  $t_{1/2}$  is a suitable means to determine its reactivity. It is dependent on temperature and can be calculated according to the Arrhenius equation.

$t_{1/2}$ (60 min)	137°C / 279°F
$t_{1/2}$ (600 min)	117°C / 243°F

## SAFETY AND HAZARD CLASSIFICATION

Please consult the Safety Data Sheet before using the product.

## STORAGE AND HANDLING

When stored at room temperatures, 24 to 26°C (75 to 79°F), Di-Cup<sup>®</sup> 40C is very chemically stable and can be held for several years without any appreciable loss of peroxide activity. However, turnover of inventory on at least an annual basis is recommended.

Do not store above: 30°C (86°F)

## PACKAGING AND TRANSPORT

Di-Cup<sup>®</sup> 40C is packaged in 100 lb fiber drums or 20 kg cartons.

**Arkema Inc. (USA)**  
900 First Avenue  
King of Prussia, PA 19406 - USA  
T +1 610 205 7000

**Arkema Investment Co. Ltd (China)**  
6/F Block 1, Life Hub@Daning  
1868 Gonghexin Road,  
200072 Shanghai - China  
T +86 21 6147 6888

**Headquarters: Arkema France**  
51, Esplanade du Général de Gaulle  
92800 Puteaux - France  
T +33 (0)1 49 00 80 80  
www.luperox.arkema.com

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/global/en/products/product-safety/disclaimer/> which is incorporated herein by reference and made a part hereof. Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790

[www.arkema.com](http://www.arkema.com)

**ARKEMA**

**harwick.com**

**Marketed By Harwick Standard Distribution Corporation**

**(330) 798-9300**